

CyclusPrint


THE ULTIMATE RECYCLED

CyclusPrint is a 100% recycled matt-coated, natural white fine printing paper for use in both full colour and black and white printing.

The non-reflective matt surface is especially suitable for publications with a combination of large text areas and high quality pictures.

Furthermore, the subtle shade of CyclusPrint is easy on the readers' eye.

CyclusPrint: 47# Text – 129# Cover

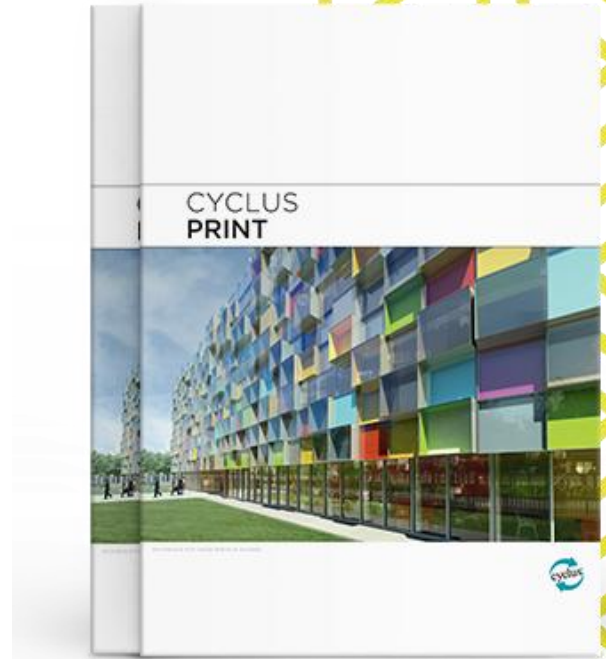

APPLICATIONS

Suitable for a wide range of applications (depending on basis weight):
Catalogues, magazines, brochures, promotional prints, posters, direct mail, report & accounts, environmental reports etc.

CERTIFICATIONS



PEFC™ certified
available on
request

Process Chlorine Free



DIN 6738



Fully compatible with all
digital presses :

Certified for
HP Indigo



For more in-depth environmental information, please download the Environmental Declaration on www.arjowigginsgraphic.com.

TECHNICAL SPECIFICATIONS

If you seek information not shown below, contact your local sales office, email julie.brannen@arjowiggins.com or visit www.arjowigginsgraphic.com.

BASIS WEIGHT	Grammage	BRIGHTNESS		OPACITY	GLOSS	CALIPER	Pt
		ISO	GE				
47 TEXT	70	83	82.5	94	15-25	0.0026	2.6
54 TEXT	80	83	82.5	94	15-25	0.0030	3.0
61 TEXT	90	83	82.5	95	15-25	0.0034	3.4
68 TEXT	100	83	82.5	96	15-25	0.0037	3.7
78 TEXT	115	83	82.5	98	15-25	0.0044	4.4
91 TEXT	130	83	82.5	98	15-25	0.0052	5.2
101 TEXT	150	83	82.5	99	15-25	0.0057	5.7
115 TEXT	170	83	82.5	99.5	15-25	0.0067	6.7
74 COVER	200	83	82.5	99.5	15-25	0.0079	7.9
92 COVER	250	83	82.5	100	15-25	0.0098	9.8
111 COVER	300	83	82.5	100	15-25	0.0124	12.4
129 COVER	350	83	82.5	100	15-25	0.0152	15.2

RECOMMENDATIONS

Prepress recommendations :

- Screen rulings (Max 175 lpi)
- For heavy ink loads, Under-colour-removal (UCR) recommended

Printing recommendations :

- Guaranteed for Offset litho
- Sheets suitable for letter press
- Suitable for use in mono and color laser printers
- Recommended fount solution pH 5.5 +/- 0.5
- Compatible with IR-drying and UV-curing
- Suitable for sheet offset, heat set web offset and narrow web offset presses

Converting recommendations :

- Suitable for offset , UV and acrylic varnishes
- Suitable for foil lamination, hot-foil blocking and cold foil blocking
- Suitable for die cutting and perforation
- Folding: pre-creasing recommended for >101# Text
- Suitable for clamps, wire thread and adhesive binding

This information is supplied in good faith and is accurate at the date of publication. Arjowiggins Graphic reserves the right to change or update information as deemed necessary.

Manufactured by:

 arjowiggins
graphic papers