


eural preprint

Eural is a range of high quality natural white 100% recycled papers, manufactured at the Papeteries du Bourray Mill in Le Mans, France. Eural is manufactured using de-inked post-consumer and post-industrial waste (the de-inked pulp is produced on site) without any bleaching processes. Eural Preprint offers a very smooth surface, good printability and high opacity. Naturally, Eural's services live up to your expectations.

- Eural Preprint is a 100% recycled uncoated paper with a natural whiteness.
- Eural Preprint is available in the following weights: 70*, 75*, 80, 90*, 100* and 115*gsm. (*available on request)

APPLICATIONS

Suitable for a wide range of applications (depending on grammage): Letterheads, corporate documents, faces, invoices, forms, direct mail, reply cards etc.

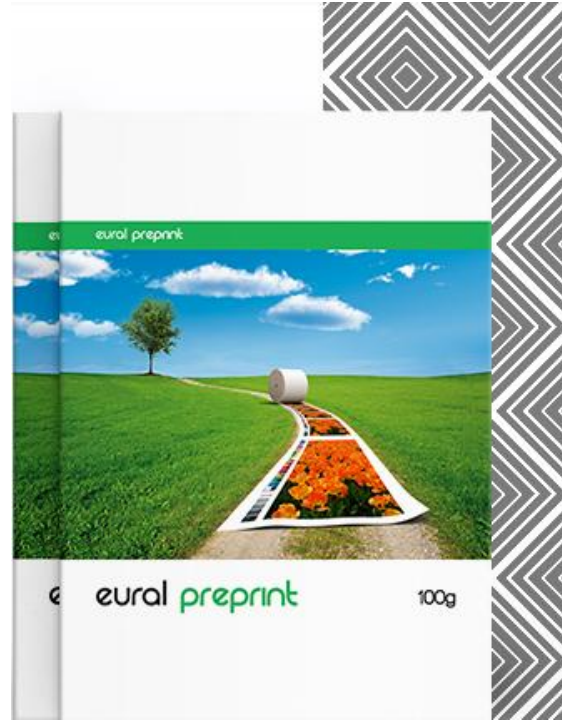

CERTIFICATIONS



The mark of responsible forestry

FSC® Recycled or PEFC™ certified available on request



DIN 6738



REACH

For more in-depth environmental information, please download the Environmental Declaration on www.arjowigginsgraphic.com.

WANT TO MAKE A DIFFERENCE?

By using 1 ton of **Eural Preprint** instead of a virgin paper, you save the equivalent of:



2,000 kg of wood



28,900 litres of water



295 kg CO2 and greenhouse gases equivalent to...



1,231 kg of landfill



3,838 kWh of electricity



2,950 km travel in the average European car

TECHNICAL SPECIFICATIONS

If you seek information not shown below, contact your local sales office, email graphic@arjowiggins.com or visit www.arjowigginsgraphic.com.

eural preprint

| ISO 536 | ISO 534 | ISO 11475 | ISO 2470-2 | ISO 2471 | ISO 5629 | | ISO 287 |
|--------------|---------------------------|---------------|--------------------|-------------|-----------------------------|-----------------------------|-----------------------|
| Weight (gsm) | Bulk (cm ³ /g) | CIE Whiteness | ISO brightness (%) | Opacity (%) | Dynamic Stiffness MD (mN.m) | Dynamic Stiffness CD (mN.m) | Relative Humidity (%) |
| 70* | 1.23 | 90 | 78 | 94 | 0.25 | 0.10 | 35-45 |
| 75* | 1.23 | 90 | 78 | 95 | 0.26 | 0.12 | 35-45 |
| 80 | 1.25 | 90 | 78 | 96 | 0.40 | 0.15 | 35-45 |
| 90* | 1.23 | 90 | 78 | 97 | 0.67 | 0.24 | 35-45 |
| 100* | 1.23 | 90 | 78 | 98 | 0.90 | 0.27 | 35-45 |
| 115* | 1.23 | 90 | 78 | 98 | 1.12 | 0.45 | 35-45 |

* Making on request

RECOMMENDATIONS

Printing recommendations :

- Guaranteed for Offset litho
- Guaranteed for laser personalisation and limited inkjet printing
- Suitable for use in mono and color laser printers
- Sheets suitable for letter press
- For subsequent laser printing respect storage conditions
- Recommended fount solution pH 5.5 +/- 0.5
- Compatible with IR-drying
- Suitable for UV inks
- Suitable for sheet offset, heat set web offset and narrow web offset presses

Converting recommendations :

- Suitable for blind embossing
- Suitable for die cutting, gumming and perforation
- Suitable for envelope machines, folding and inserting process

Manufactured by:

 arjowiggins

————— graphic papers