

# CyclusUncoated


THE ULTIMATE RECYCLED

CyclusUncoated is a 100% recycled uncoated, natural white offset paper with its very own character.

The paper accentuates the creative message, where touch and feel combine with – and support – the visual image.

With its special properties Cyclus Uncoated can reproduce strikingly beautiful monochrome and full-colour pictures and its excellent opacity allows for clear and legible reproduction of pictures, even at low grammage weights.

Cyclus Uncoated: 47# Text – 129# Cover

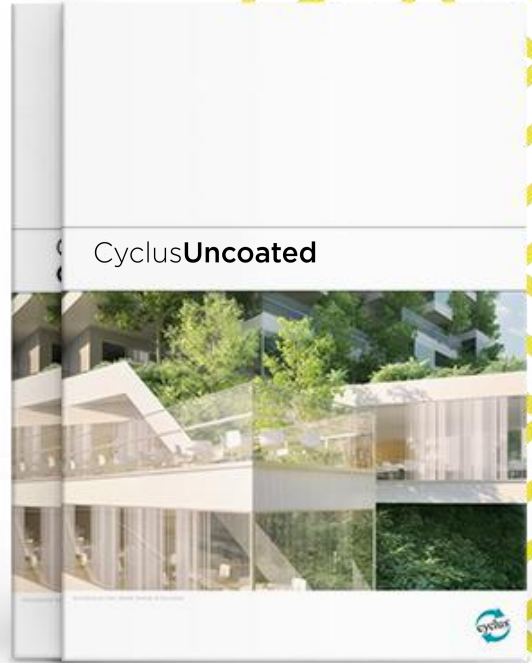

## APPLICATIONS

**Suitable for a wide range of applications** (depending on basis weight):  
Catalogues, magazines, stationery, brochures, promotional prints, posters, direct mail, report & accounts, environmental reports etc.

## CERTIFICATIONS



PEFC™ certified  
available on  
request

**Process Chlorine Free**



DIN 6738



Fully compatible with all  
digital presses :

Certified for  
**HP Indigo**

**DRY  
Toner**



For more in-depth environmental information, please download the Environmental Declaration on [www.arjowigginsgraphic.com](http://www.arjowigginsgraphic.com).

## TECHNICAL SPECIFICATIONS

If you seek information not shown below, contact your local sales office, email [julie.brannen@arjowiggins.com](mailto:julie.brannen@arjowiggins.com) or visit [www.arjowigginsgraphic.com](http://www.arjowigginsgraphic.com).

BASIS WEIGHT	GRAMMAGE	BRIGHTNESS		OPACITY	SHEFFIELD SMOOTHNESS	CALIPER	Pt
		D65	GE				
47 TEXT	70	83	82.5	94	156	0.0033	3.3
54 TEXT	80	83	82.5	95	156	0.0038	3.8
61 TEXT	90	83	82.5	96	156	0.0043	4.3
69 TEXT	100	83	82.5	97	156	0.0047	4.7
78 TEXT	115	83	82.5	98	156	0.0054	5.4
95 TEXT	140	83	82.5	99	156	0.0066	6.6
101 TEXT	150	83	82.5	99	156	0.0071	7.1
115 TEXT	170	83	82.5	99	211	0.0080	8.0
74 COVER	200	83	82.5	99.5	211	0.0094	9.4
92 COVER	250	83	82.5	99.5	211	0.0118	11.8
111 COVER	300	83	82.5	100	185	0.0142	14.2
129 COVER	350	83	82.5	100	185	0.0160	16.0

## RECOMMENDATIONS

### Prepress recommendations :

- Screen rulings (Max 150 lpi)
- For heavy ink loads, Under-colour-removal (UCR) recommended

### Printing recommendations :

- Guaranteed for Offset litho
- Sheets suitable for letter press
- Compatible with IR-drying
- Suitable for use in mono and color laser printers
- Recommended fount solution pH 5.5 +/- 0.5
- Suitable for sheet offset, heat set web offset, laser and narrow web offset presses
- Suitable for water based offset varnishes (pre-testing recommended)

### Converting recommendations :

- Suitable for blind embossing - avoid sharp edges on tools
- Suitable for hot-foil blocking / cold foil blocking
- Suitable for die cutting and perforation
- Folding: pre-creasing recommended for > 101# Text
- Suitable for clamps, wire thread and adhesive binding

This information is supplied in good faith and is accurate at the date of publication. Arjowiggins Graphic reserves the right to change or update information as deemed necessary.

Fully compatible with all digital presses :

Certified for  
HP Indigo



Manufactured by:

 arjowiggins  
graphic papers